

ES 75-12

12V - 75Ah

INTRODUCTION

The most advanced technology of ROCKET, Valve Regulated Lead Acid batteries make them highly useful in a broad range of applications. The use of high-purity calcium alloy maximizes the longevity of ROCKET batteries to ensure excellent performance in any circumstances.

ES Series are specially designed to provide better cyclic life and are ideally suited for areas prone to frequent power failures.





The unique construction coupled with the use of special sealing epoxies and long sealing paths of ROCKET series ensures that no electrolyte leakage can occur from terminals or cases of any ROCKET Batteries. This feature ensures safe & efficient operation of ROCKET batteries in any position.

TECHNICAL FEATURES

- Non-Spillable Sealed Construction
- Absorptive Glass Mat System (AGM System)
- ABS (Acrylonitrile Butadiene Styrene) container and cover
- Micro millimeter SiO₂ and H₂SO₄ gelled electrolyte technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Maintenance-Free Operation
- Low Pressure Venting System
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Low Self-Discharge - Long Shelf Life
- Wide Operating Temperature Range

APPLICATIONS

- UPS
- Telecom Communication Equipments
- Medical Instruments
- Computer Backup
- Solar Powered Systems.
- Motive power applications, such as golf trailer, scrubber, forklift, etc.

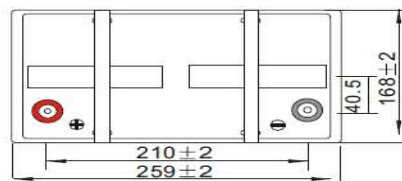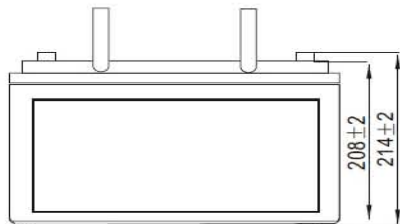

SPECIFICATION

Nominal Voltage		12V
Capacity (20HR, 25°C)		75Ah
Dimension	Length	259mm (10.20inch)
	Width	168mm (6.61inch)
	Height	208mm (8.19inch)
	Total Height	214mm (8.43inch)
Approx Weight		21kg (46.3lbs)
Design Life		10 Years

CHARACTERISTICS

Capacity 25°C (77°F)	20 hour rate	78Ah
	10 hour rate	75Ah
	5 hour rate	64.5Ah
	1 hour rate	45.8Ah
Internal resistance (Fully charge, 25°C)		6.6mΩ
Self-discharge (25°C)	1 month	Remaining Capacity:97%
Operating temperature range	Discharge	-20°C~60°C
	Charge	-10°C~60°C
	Storage	-20°C~60°C
Maximum discharge current		77°F(25°C)900A(5 Sec.)
Charge Methods (Constant Voltage Charge 77°F(25°C)) - Cyclic Use		Cycle Use 14.4 to 15.0V Temp. compensation - 30mV/°C
Charge Methods (Constant Voltage Charge 77°F(25°C)) - Standby Use		Standby Use 13.5-13.8V Temp. compensation - 20mV/°C

COMPLAINTS STANDARD

- JIS
- IEC 60896 PART 1 & 2
- BS6290-4,
- EurobatGuide - HIGH Performance

ES 75-12

12V - 75Ah

CONSTANT CURRENT DISCHARGE (Amperes) at 25°C

End Point Volts/Cell	5min	10min	15min	20min	30min	45min	60min
1.60V	260.2	180.9	137.5	108.6	81	57.9	45.8
1.65V	235.9	166.7	128.6	101.9	76.7	55.6	44.2
1.70V	213.9	154.4	120.9	95.9	72.7	54.2	42.7
1.75V	194.3	141.7	113.3	91.3	69.9	52.1	41.4
1.80V	172.3	128.9	103.7	84.9	67.3	50.2	39.6


End Point Volts/Cell	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	28.2	21.6	17.4	14.1	12	9.3	7.89	4.09
1.65V	27.2	20.9	16.8	13.6	11.7	9.21	7.81	4.07
1.70V	26.5	20.1	16.3	13.2	11.5	9.07	7.65	4.01
1.75V	25.5	19.5	15.9	12.9	11.2	8.94	7.58	3.94
1.80V	24.6	19.2	15.5	12.6	10.9	8.79	7.5	3.9

CONSTANT POWER DISCHARGE (Watts per cell) at 25°C

End Point Volts/Cell	5min	10min	15min	20min	30min	45min	60min
1.60V	431.3	307.6	240.6	194.6	147.7	107.4	86
1.65V	400.3	289.9	228.8	184.7	140.9	103.6	83.5
1.70V	368.2	271.1	216.8	175.1	134.6	102	81.4
1.75V	343.9	254.5	205.9	167.9	130.1	98.4	79.1
1.80V	311.7	235.4	190.9	157.6	126.3	95.8	76

End Point Volts/Cell	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	53.4	41.2	33.4	27.1	23.2	18.2	15.5	8.05
1.65V	52	40.1	32.5	26.3	22.8	18	15.4	8.02
1.70V	50.8	38.7	31.5	25.7	22.4	17.8	15.1	7.92
1.75V	49	37.7	30.8	25.1	22	17.6	14.9	7.78
1.80V	47.4	37.1	30.2	24.6	21.4	17.3	14.8	7.71

ES-CYCLE LIFE EXPECTANCY

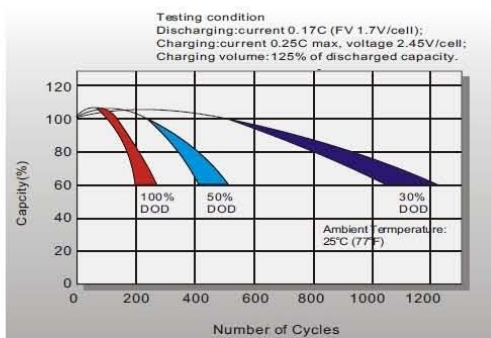

Discharge Characteristics

